


包装机领军者
Leader Of Packaging Machine

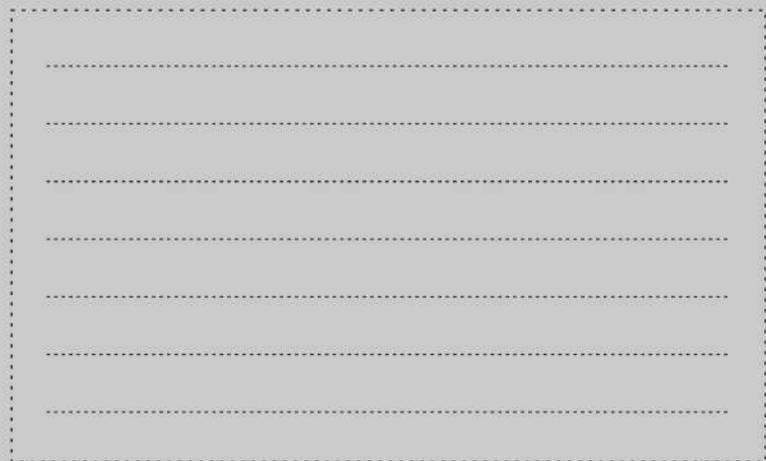

温州市华侨包装机械厂 WENZHOU HUAQIAO PACKING MACHINE FACTORY

温州工厂/Wenzhou Factory

地址：浙江省温州市空港新区港富路15号
ADD: NO.15 Gangfu Road, Konggang
New Area, Wenzhou, Zhejiang.
电话(TEL) : 0577-88633888 88631988
传真(FAX) : 0577-88628808

国际部 /International Department

电话(TEL) : +86-577-88998813
传真(FAX) : +86-577-88996613
<http://www.huaqiaopm.com>
E-mail:huaqiaopm@huaqiaopm.com
<http://www.kunba.com>

上海工厂/Shanghai Factory

地址：上海市嘉定区黄渡镇春浓路732号
ADD:NO.732 Chunong Road,Huangdu Town
Jiading Area Shanghai
电话(TEL) : 021-69596266 69596268
传真(FAX) : 021-69596267

投诉邮箱 /Complaint email

E-mail:
2725447904@qq.com



网站/website



封口机系列
continuous sealer series



温州工厂



上海工厂

捆霸 (KUNBA) 是温州市华侨包装机械厂的品牌, 专业从事包装机械设备和通用包装设备的制造和销售。我们自豪地向您介绍我们的品牌故事。参观公司, 洽谈业务以及获取更多相关信息。

****品牌历史****

自1985年成立并于1987年注册公司以来, 捆霸 (KUNBA) 已经有40年的历史。在这段时间里, 我们专注于设计和制造高质量的包装机械设备, 包括真空机、连续封口机、封箱机、真空贴体和打码机。

****品牌理念****

我们的理念是: “选择捆霸, 选择放心。”我们为国内外医疗、食品、日化、电器等行业的客户提供卓越的产品、可靠的质量和出色的服务。这使我们赢得了来自一百多个国家和地区的一致好评, 使捆霸 (KUNBA) 成为行业内知名品牌。近年来, 捆霸 (KUNBA) 的产品已被近千家单位购买和使用, 遍布全球100多个国家和地区, 其中包括众多著名的世界500强公司。欧洲的同行还将我们指定为定制生产 (OEM) 的供应商。

****质量认证****

我们公司通过了ISO9001-2000国际质量管理体系、CE、TUV和SGS认证, 同时被授予“中国质量服务信誉AAA级”的荣誉。

****公司愿景****

捆霸 (KUNBA) 坚持以“做百年企业, 服务于世界”为愿景。公司拥有29000平方米的工厂和180多名员工, 以确保产品的研发、生产、装配、调试和交付各个环节都经过严格的质量控制。我们不断创新和改进产品设计, 以确保产品具有市场竞争力和满足客户需求。

****量身定做服务****

华侨包装还提供“量身定做”的服务, 根据客户的具体需求专门为客户定制特殊的机型。我们的产品正朝着系列化、全面化、节能化和人性化的方向发展。捆霸 (KUNBA) 将继续完善和发展, 为广大客户提供高质量和人性化的产品与服务, 因为我们专注于专业。我们热烈欢迎各界朋友前来参观公司, 洽谈业务以及获取更多相关信息。

KUNBA is a brand manufactured by Wenzhou Huqiao Packaging Machinery Factory, specializing in the production and sale of packaging machinery and general packaging equipment. We are proud to introduce our brand background to you.

****Brand History****

Founded in 1985 and registered as a company in 1987, KUNBA has a 40-year history. During this time, we have focused on designing and manufacturing a range of high-quality packaging machinery and equipment, including vacuum machines, continuous sealing machines, carton sealing machines, vacuum labeling machines, and coding machines.

****Brand Philosophy****

Our philosophy is, "Choose KUNBA, Choose assurance." We serve numerous customers in the medical, food, daily chemical, electronics, and other industries both domestically and internationally. With outstanding products, reliable quality, and excellent service, we have received consistent praise from more than a hundred countries and regions, establishing KUNBA as a well-known brand in the industry. In recent years, KUNBA products have gained recognition from a wide customer base, and we have been designated as an OEM supplier by European peers.

****Quality Certification****

Our company has obtained ISO9001-2000 international quality management system, CE, TUV, and SGS certifications, and has been awarded the title of "China Quality Service Credibility AAA."

****Company Vision****

KUNBA adheres to the vision of being a "century-old enterprise serving the world." With a 29,000 square meter factory and over 180 employees, we rigorously control the quality of our products in every stage, from research and development to production, assembly, debugging, and delivery. Through continuous innovation and improvement in product design, we ensure the competitiveness and applicability of our products in the market.

****Customization Services****

Huqiao Packaging also offers "tailor-made" services, creating special machine models according to the specific needs of customers. Our products are moving towards serialization, comprehensiveness, energy efficiency, and humanization. KUNBA will continue to provide high-quality and user-friendly products and services to customers worldwide because we are dedicated to professionalism. We warmly welcome friends from all walks of life to visit our company, engage in business discussions, and inquire about relevant information.

公司荣誉



- ◆ Devote to Packing Machine since 1987.
- ◆ 90000 square meters, 150 employees.
- ◆ Over 10 million dollars annual sales, 60% export to worldwide.
- ◆ well-equipped facilities and excellent quality control.
- ◆ SO9001:2008 CE certificate approved.
- ◆ OEM and customized -design service supplied.

坚持不懈 力求完美
CONSTANTLY STRIVE TO PERFECT
只有客户的成功, 才有华侨的发展

WORKSHOP OVERVIEW

车间概览



PROCESSING EQUIPMENT

加工设备



MULTI-FUNCTIONAL BAND SEALER

多功能薄膜封口机

PATENT NUMBER: ZL02219651.X

中国专利号: ZL02219651.X

KUNBA牌系列薄膜封口机适用于各种塑料薄膜的封口与制袋, 广泛应用于食品、医药、化工、土特产品、电子元件等行业, 它是工厂、商店等部门使用的最佳封口设备

-Adjustable temperature and speed
-Emboss number and letter

-Work smoothly without wear-and-tear
-Durable heater and motor

-Cooling fan protect film from wrinkle

Continuous Sealer (Horizontal)

SMT-150W

卧式薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-150W	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	< 8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	22kg/25kg

Continuous Sealer (Vertical)

SMT-150LW

立式薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-150LW	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	<8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	25kg/27kg

MULTI-FUNCTIONAL BAND SEALER 多功能薄膜封口机

Continuous Sealer (Conveyor width 28CM)

SMT-150WK 卧式薄膜封口机 (加宽型28CM)



技术参数/Technology Parameters

型号/Model	SMT-150WK	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	< 8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x445mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	29.5kg/32.5kg

Continuous Sealer Horizontal (protective type)


SMT-150WF 卧式薄膜封口机(防护型)




技术参数/Technology Parameters

型号/Model	SMT-150WF	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	<5kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	22.5kg/25.5kg

150 Series Panel Operation Instructions 150系列面板说明书

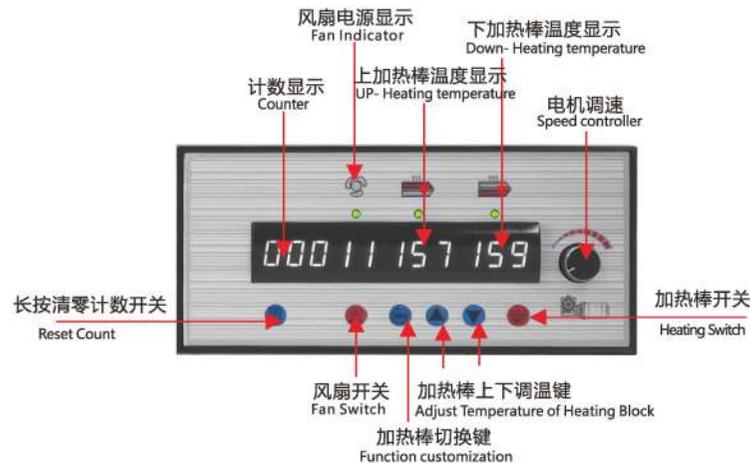


150系列可定制以下功能 Following function can be customized.

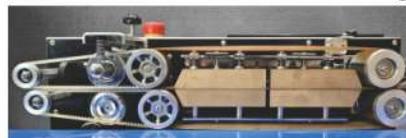


①左右双加热系列
Left and right side heating are option



②加宽2CM封口
2CM sealing widen are optional

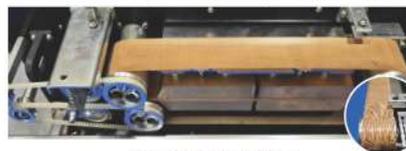

③可加宽4CM封口
4CM sealing widen are optional

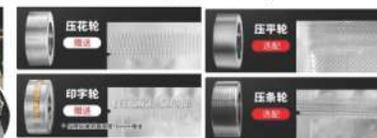

④可更换不同印花轮
Various Printing Wheel are optional



⑤可做反手封口机
Opposite direction are optional



⑥节能陶瓷加热棒
Saving energy heating are optional
(加热时间提高40%，耐用度提高300%)
Save 40% heating time and increase 300% durability.

★SMT系列更适用市面上98%的薄膜袋。
SMT series sealer can be used in 98% of the bags on the market.

SOLID INK CONTINUOUS SEALER

墨轮印字薄膜封口机

PATENT NUMBER: ZL02219651.X -Adjustable printing position temperature and speed -Work smoothly without wear and tear
中国专利号: ZL02219651.X -Cooling fan protect film from wrinkle -Print 3 lines with ink
-Durable heater and motor -Vertical and horizontal double-use

Continuous Sealer (Horizontal)

SMT-980W

卧式墨轮印字薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-980W	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-260°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x365mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	26kg/29kg

Continuous Sealer (Vertical)

SMT-980LW

立式墨轮印字薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-980LW	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-260°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x365mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	29kg/32kg

SOLID INK CONTINUOUS SEALER

墨轮印字薄膜封口机

Continuous Sealer (28cm Wider Belt)

SMT-980WK

卧式墨轮印字 薄膜封口机(加宽型)



技术参数/Technology Parameters

型号/Model	SMT-980WK	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	980x580x390mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	39.5kg/32.5kg

Continuous Sealer (Protective)

SMT-980WF

卧式墨轮印字 薄膜封口机(防护型)




技术参数/Technology Parameters


型号/Model	SMT-980WF	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x365mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	26kg/29kg

980 Series Panel Operation Instructions

980系列面板说明书

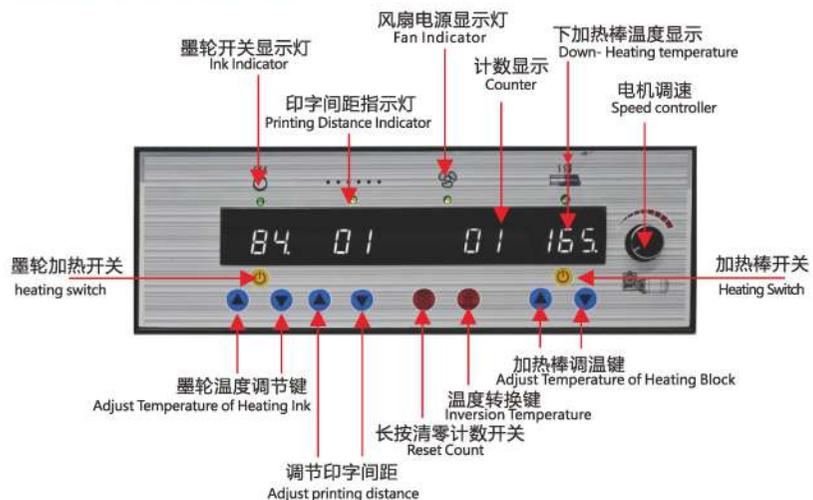

980系列可定制以下功能 Following function can be customized.

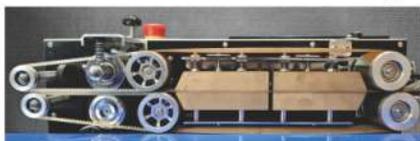

①左右双加热系列
Left and right side heating are option



②加宽2CM封口
2CM sealing widen are optional



③可更换不同印花轮
Various Printing Wheel are optional



④节能镍瓷加热棒
Saving energy heating are optional
(加温时间提高40%，耐用度提高300%)
Save 40% heating time and increase 300% durability.



⑤可做反手封口机
Opposite direction are optional

EUROPEAN STANDARD CONTINUOUS SEALER 多功能薄膜封口机

Continuous Sealer (Horizontal type)

SF-770I
SF-770IFS(反手型)
卧式薄膜封口机



技术参数/Technology Parameters

型号/Model	SF-770I / SF-770IFS(反手型)	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	65W	输送总承载/Conveyor Loading	<5kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-16m/min (米/分)	净重/毛重/N.W&G.W	16kg/19kg

Continuous Sealer (Vertical type)

SF-770II
SF-770IIFS(反手型)
立卧薄膜封口机




技术参数/Technology Parameters

型号/Model	SF-770LW / 770LWFS	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	65W	输送总承载/Conveyor Loading	<5kg
封口电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x470x375mm
封口速度/Sealing Speeds	0-16m/min (米/分)	净重/毛重/N.W&G.W	18kg/21kg

应用场景示意 / Application

集成包含 / Integration Includes

- | | |
|-------------|---|
| SMT正手封口机X4台 | SMT Band sealer (from right to left) X4 |
| SMT反手封口机X4台 | SMT Band sealer (from left to right) X4 |
| 皮带输送线X1条 | Belt Conveyor X1 |
| 金属检测设备X1台 | Metal detection equipment X1 |
| 整理圆盘X1台 | Sorting disc X1 |

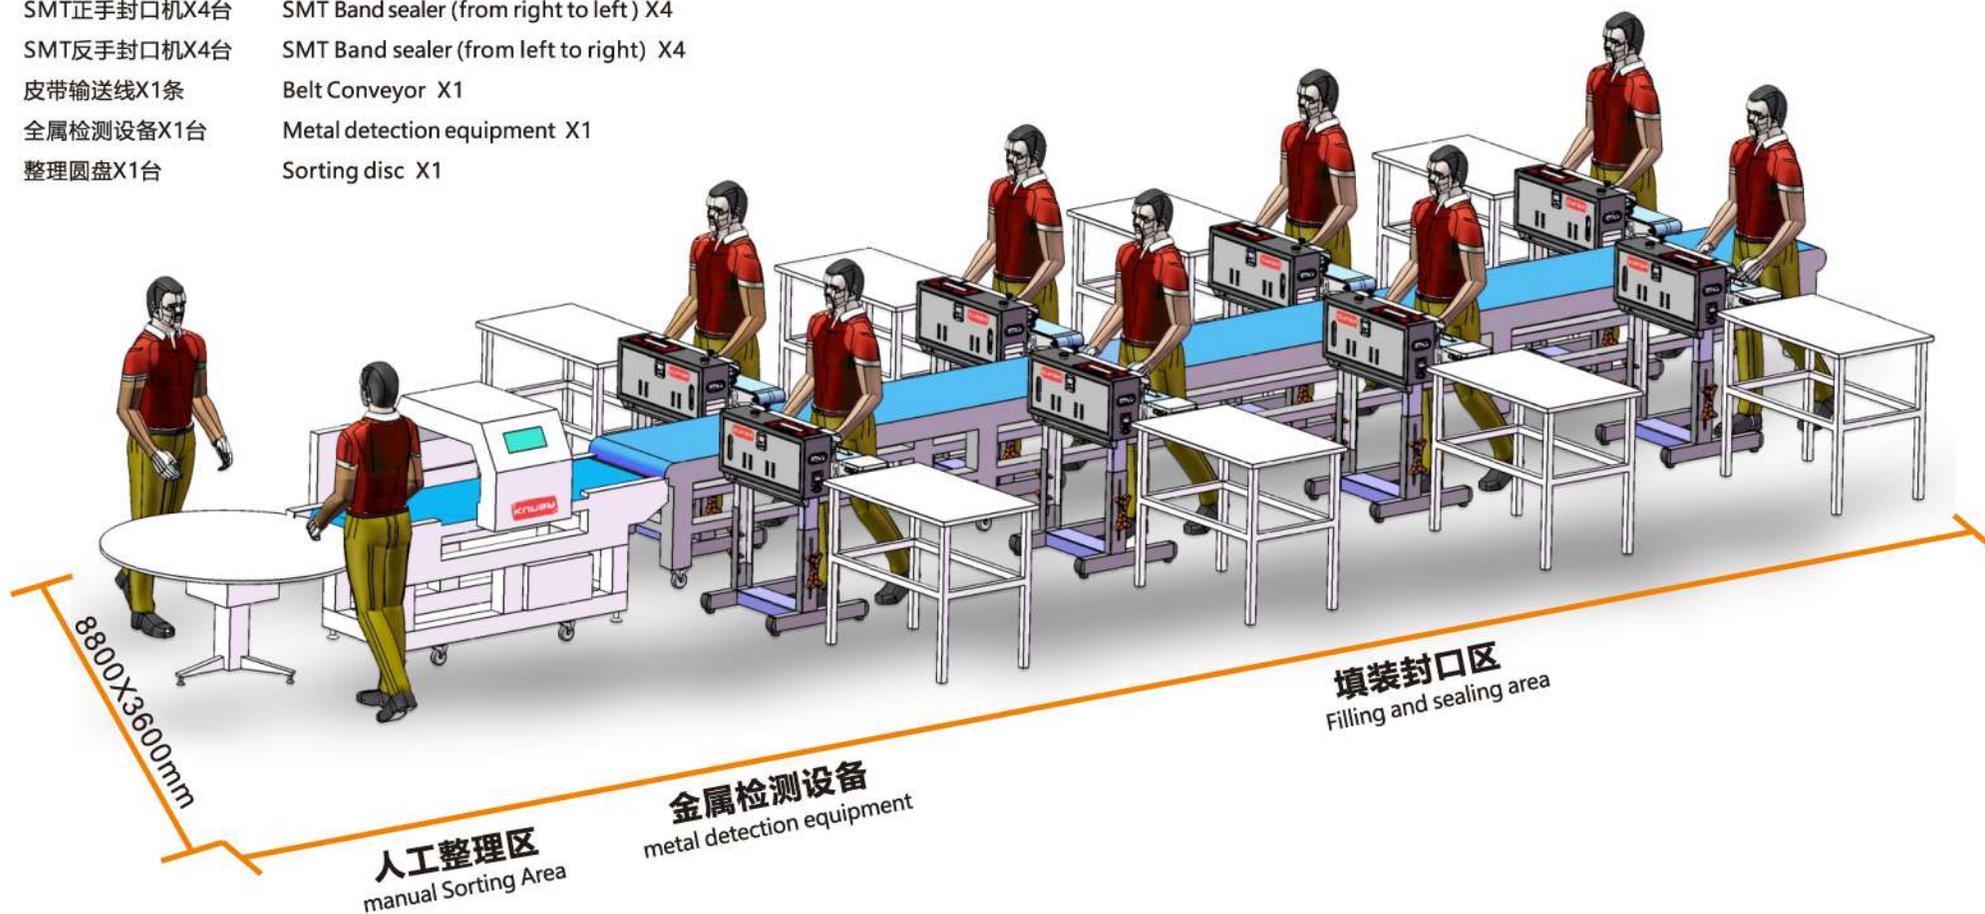

建议面积 $\geq 33\text{M}^2$
Proposed Area

Ribbon code printing Continuous Sealer (Horizontal)

SMT-150SD

卧式色带打码印字薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-150SD	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-260°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	< 8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	970x470x520mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	23.5kg/26.5kg

Nitrogen flushing continuous Sealer (Vertical)

FRM-980CD

充氮气型立卧式薄膜封口机



技术参数/Technology Parameters

型号/Model	FRM-980CD	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	< 5kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x445mm
封口速度/Sealing Speeds	0-16m/min (米/分)	净重/毛重/N.W&G.W	35.5kg/38.5kg

CONTINUOUS SEALER

充气封口机

Air-filling Continuous Sealer (Embossing /Solid ink)

FRM-980CQ

落地式充气薄膜封口机(钢印)

FRM-1020CQ

落地式充气薄膜封口机(墨轮充气)



技术参数/Technology Parameters

型号/Model	FRQM-980CQ/FRQM-1020CQ	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	< 5kg
气泵功率/Airpump Power	200W	外包装尺寸/Shipment Dimension	1030x590x880mm
电热功率/Heating Power	280Wx2	净重/毛重/N.W&G.W	41kg/48kg
封口速度/Sealing Speeds	0-16m/min (米/分)		

Ink-jet Sealer

SMT-1280

电脑喷墨封口机



技术参数/Technology Parameters

型号/Model	SMT-1280	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-260°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	< 10kg
气泵功率/Airpump Power	200W	外包装尺寸/Shipment Dimension	1140x595x885mm
封口速度/Sealing Speeds	0-24m/min (米/分)	净重/毛重/N.W&G.W	46kg/53kg

MULTI-FUNCTIONAL SEALER

多功能薄膜封口机

Continuous-Vacuum Sealer and air filling

SMT-1080

多功能连续式真空抽气
/充气封口机



技术参数/Technology Parameters

型号/Model	SMT-1080	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	< 10kg
气泵功率/Heating Power	200W	外包装尺寸/Shipment Dimension	1110x510x990mm
封口速度/Sealing Speeds	0-25m/min (米/分)	毛重/G.W	78kg

Big bag Sealer (Vertical)

FRM-1480

大袋多功能立式封口机



技术参数/Technology Parameters

型号/Model	FRM-1480	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	AC220/50Hz 110V/60Hz	输送总承载/Conveyor Loading	< 20kg
总功率/Power Consumption	750W	外包装尺寸/Shipment Dimension	1560x680x1460mm
封口速度/Sealing Speeds	0-16m/min (米/分)	毛重/G.W	78kg
封口宽度/Sealing Width	5-10mm	可调高度/Adjustable Height	180-600mm

MULTI-FUNCTIONAL SEALER

多功能薄膜封口机

Sealing Machine for big bag

SF-700QY

气压大袋封口机



技术参数/Technology Parameters

型号/Model	SF-700QY	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	AC220/50Hz 110V/60Hz	输送总承载/Conveyor Loading	< 15kg
总功率/Power Consumption	500W	外包装尺寸/Shipment Dimension	720x560x1340mm
封口速度/Sealing Speeds	0-13m/min (米/分)可调	净重/毛重/N.W&G.W	130kg
封口宽度/Sealing Width	8-10mm		

Multi-functional film sealer(Horizontal)

FRM-1280PM

大袋多功能卧式封口机



技术参数/Technology Parameters

型号/Model	FRM-1280PM	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	AC220/50Hz 110V/60Hz	输送总承载/Conveyor Loading	< 20kg
总功率/Power Consumption	750W	外包装尺寸/Shipment Dimension	1100x610x1030mm
封口速度/Sealing Speeds	0-12m/min (米/分)	净重/毛重/N.W&G.W	122kg
封口宽度/Sealing Width	5-10mm		

Manual Sealer/Pedal Sealer 手压/脚踏封口机



手压封口机 (塑壳、铝壳)
Manual Sealer(plastic, aluminum)

PFS100-400

技术参数/Technology Parameters

型号/Model	PFS100	PFS200	PFS300	PFS400
电源电压/Power Supply	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz
总功率/Power Consumption	250W	300W	450W	600W
最大封口尺寸/Max Sealing Size	150mm	200mm	300mm	400mm
外包装尺寸/Shipment Dimension	72X220X10mm	80X320X150mm	80X450X180mm	85X550X180mm
毛重/Gross Weight	1.9kg	3.0kg	4.5kg	5.5kg

脚踏封口机 (落地式)
Pedal Sealer (ground)

PFS350-800JT

技术参数/Technology Parameters

型号/Model	PFS350JT	PFS450JT	PFS600JT	PFS800JT
电源电压/Power Supply	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz
总功率/Power Consumption	1200W	1250W	1500W	1800W
最大封口尺寸/Max Sealing Size	350mm	450mm	600mm	800mm
外包装尺寸/Shipment Dimension	880X550X250mm	880X550X250mm	880X550X250mm	920X550X250mm
毛重/Gross Weight	19kg	21kg	24.5kg	26kg

脚踏封口机 (带打码)
Pedal Sealer (with Printer)

PFS350-800JT

技术参数/Technology Parameters

型号/Model	PFS350JT	PFS450JT	PFS600JT	PFS800JT
电源电压/Power Supply	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz
总功率/Power Consumption	1500W	1700W	1900W	2100W
最大封口尺寸/Max Sealing Size	350mm	450mm	600mm	800mm
外包装尺寸/Shipment Dimension	880X550X250mm	880X550X250mm	880X550X250mm	920X550X250mm
毛重/Gross Weight	21kg	23kg	27kg	28kg

RIBBON PRINTER HP系列色带打码机

据霸牌系列打码机广泛适用于食品、医药等行业，具有印刷精美，字迹牢固，无污染，换字方便等优点，能完美印刷各种包装材料，如：PT、PE、OPP、铝箔、纸等。

- Special design economize ribbons
- Stable footing
- Clear printing
- No hazard
- 3 lines of letter an number

手压色带打码机 (电脑版)
Manual ribbon printer(Digital version)

HP-241S



技术参数/Technology Parameters

型号/Model	HP-241S
电源电压/Power Supply	AC110-220V/60-50Hz
总功率/Power Consumption	100W
印字行数/Printing Lines	1-3行 (line)
速度/Printing Speed	20-120pcs/min
外包装尺寸/Shipment Dimension	240x240x140mm
净重/毛重/N.W&G.W	5.0KG/5.6KG

电动色带打码机 (电脑版)
Electrical ribbon printer(Digital version)

HP-23S



技术参数/Technology Parameters

型号/Model	HP-23S
电源电压/Power Supply	AC110-220V/60-50Hz
总功率/Power Consumption	120W
印字行数/Printing Lines	1-3行 (line)
速度/Printing Speed	20-120pcs/min
外包装尺寸/Shipment Dimension	295x285x350mm
净重/毛重/N.W&G.W	8.5kg/9.3kg



励磁纯铜电机+高效涡轮蜗杆减速箱



斜齿轮 转动平稳 噪声小 承载力强 啮合性好